


M - 900

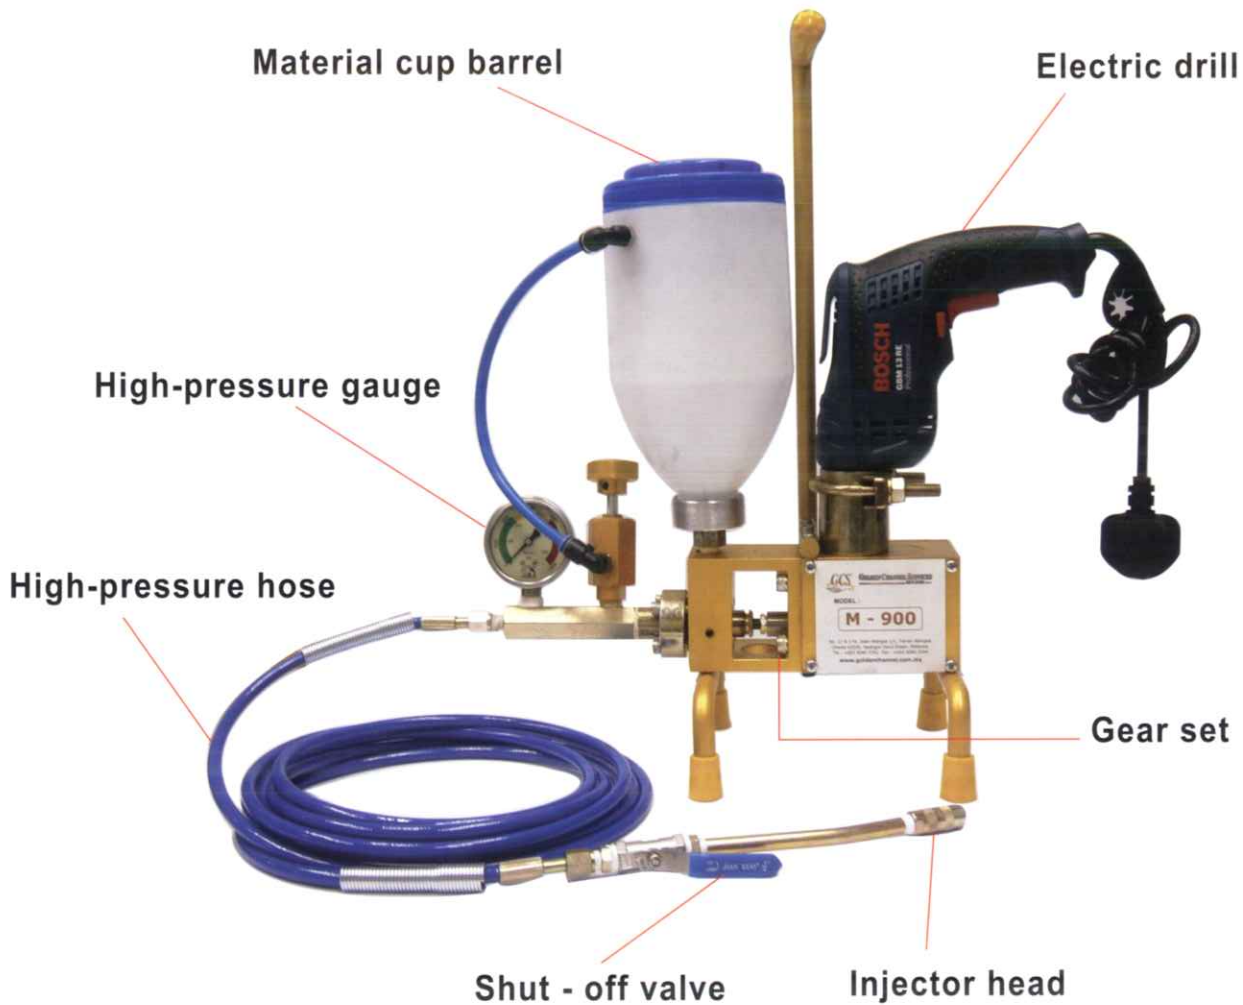

SPECIFICATIONS

Power	220V\560W\50HZ
Discharge Flow Rate	0~0.8L/min
Working Pressure	0~400kg/cm ² (0~6000 PSI)
Maximum Pressure	400~550kg/cm ² (6000~8000 PSI)
Suction Type	Gravity Flow
Size (Box)	510mm x 205mm X 540mm
Weight	9kg

1. Test run the machine before operation.
2. Pour in the polyurethane resin into the material holding cup and cover the cup lid.
3. Connect the injection nozzle head with the drilled packers.
4. Inject the polyurethane resin into the concrete structure until overflows.
5. Turn off the power and the valve switch.
6. Clean the pump machine and material holding cup using cleanser.

Accessories and Spare Parts Available : -



Injector Head



Injector Packer



Pressure Gauge



High Pressure Hose



Shut - Off Valve



Gas Torch



Gold Foam



GOLDEN CHANNEL SERVICES

SDN BHD (162495-H)

No. 17 & 17A, Jalan Wangsa 1/1, Taman Wangsa, 43200 Cheras, Selangor Darul Ehsan, Malaysia.
Tel : +603 9080 5762 Fax : +603 9080 5764 Email : admin@goldenchannel.com.my
www.goldenchannel.com.my